

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number  
**WO 2004/022911 A2**

(51) International Patent Classification<sup>7</sup>: **E21B 43/08**

(21) International Application Number:  
PCT/EP2003/010004

(22) International Filing Date:  
5 September 2003 (05.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02078685.1 6 September 2002 (06.09.2002) EP

(71) Applicant (for all designated States except US): **SHELL  
INTERNATIONALE RESEARCH MAATSCHAPPIJ  
B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR  
The Hague (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOSMA, Martin,**


**Gerard, Rene** [NL/NL]; Volmerlaan 6, NL-2288 GD  
Rijswijk (NL). **CORNELISSEN, Erik, Kerst** [NL/NL];  
Volmerlaan 6, NL-2288 GD Rijswijk (NL). **DEWAR,  
John, Alexander, Gordon** [US/NL]; Volmerlaan 8,  
NL-2288 GD Rojswojk (NL). **MASON, David, Leslie**  
[US/US]; 1723 Beacon Cove Court, Katy, TX 77450 (US).  
**VOLLEBREGT, Jean, Erik** [NL/NL]; Volmerlaan 8,  
NL-2288 GD Rijswijk (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **WELLBORE DEVICE FOR SELECTIVE TRANSFER OF FLUID**

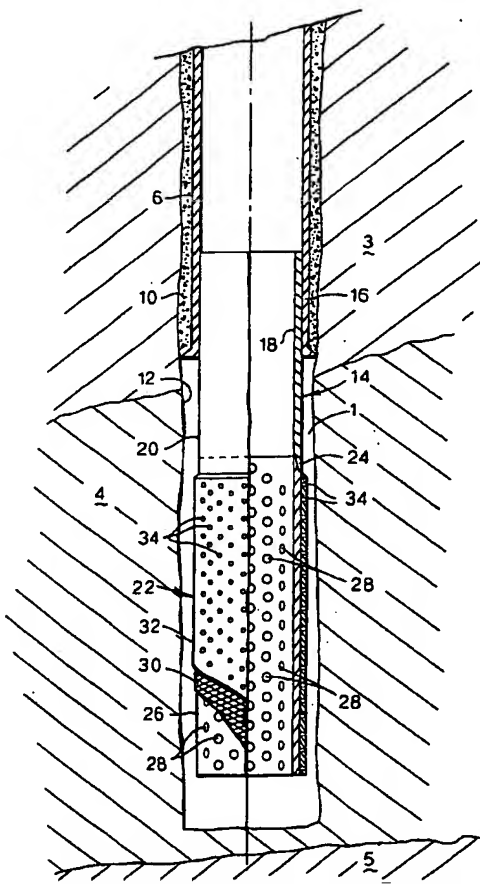

(57) Abstract: A wellbore device is provided which comprises a fluid passage for transferring fluid between an earth formation and a surface facility, and a body transferable from a first mode to a second mode upon contact of the body with a selected fluid. Said body is arranged so as to substantially close the fluid passage upon transfer of the body from the first mode to the second mode due to contact of the body with the selected fluid.

022911 A2



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

## WELLBORE DEVICE FOR SELECTIVE TRANSFER OF FLUID

The present invention relates to a wellbore device comprising a fluid passage for transferring fluid between an earth formation and a surface facility.

In the production of hydrocarbon fluids from a wellbore formed in the earth formation it can be desired to prevent transfer of a selected fluid between the earth formation and the surface facility. For example, the hydrocarbon fluid reservoir generally overlays a water-containing layer of the earth formation. After continued production of oil or gas from the reservoir, the water level below the reservoir may rise to the level of the intake zone of the wellbore. Also, under certain conditions of hydrocarbon fluid production an effect named "water-coning" may occur whereby water is drawn from the water-containing layer to the wellbore intake zone. As a result an increased amount of water will be produced, at the cost of production of hydrocarbon fluid. Such undesired fluid production can significantly reduce the economics of a hydrocarbon fluid prospect. Thus, there is a need to provide a means for reducing the transfer of undesired fluid while still allowing the transfer of desired fluid.

Accordingly, it is an object of the invention to provide an improved wellbore device comprising a fluid passage for transferring fluid between an earth formation and a surface facility, which device meets the aforementioned need.

In accordance with the invention there is provided a wellbore device comprising a fluid passage for

transferring fluid between an earth formation and a surface facility, and a body transferable from a first mode to a second mode upon contact of the body with a selected fluid, said body being arranged so as to substantially close the fluid passage upon transfer of the body from the first mode to the second mode due to contact of the body with the selected fluid.

It is thereby achieved that, when the selected fluid reaches said body, the fluid passage becomes closed so as to prevent transfer of the selected fluid between the formation and the surface facility. If the selected fluid is an undesired formation fluid such as formation water, transfer of the undesired fluid from the formation to the surface facility is thus prevented.

Suitably the wellbore device is adapted to be arranged in a wellbore formed in the earth formation.

Preferably said body has a larger volume in the second mode than in the first mode.

In a preferred embodiment of the device, said body comprises a body of swelleable material which swells upon contact of the body with the selected fluid, said body of swelleable material being arranged so as to substantially close each fluid passage upon swelling of said body due to contact of the body with the selected fluid.

Selective inflow of desired fluid into the wellbore while preventing inflow of undesired fluid is preferably achieved by providing said body with a plurality of said fluid passages, whereby only a part of said body is swollen due to contact of said part of the body with the selected fluid, and wherein the fluid passages formed in the swollen part are closed while the fluid passages in the remaining part of said body are open.

Advantageously the device further includes a perforated tubular conduit, and wherein the body of swelleable material includes a sleeve of swelleable material, said sleeve extending around the perforated tubular conduit.

To prevent sand production from the wellbore, suitably the perforated tubular conduit is provided with a filter layer preventing flow of sand particles from the wellbore to the surface facility.

Suitably the filter layer is arranged between the perforated tubular conduit and the sleeve of swelleable material.

The sleeve can be, for example, a permeable sleeve, a perforated sleeve, or a sleeve having an open weave structure.

The invention will be described hereinafter in more detail and by way of example with reference to the accompanying drawing in which:

Figure 1 schematically shows an embodiment of the wellbore device of the invention.

Referring to Fig. 1 there is shown a lower part of a wellbore 1 formed into an earth formation 3 having a zone 4 containing hydrocarbon oil, and a zone 5 containing water below the hydrocarbon oil zone 4.

A casing 6 extends from surface to a depth at a selected distance from the wellbore bottom 8. A cement layer 10 between the casing 6 and the wall 12 of the wellbore 1 fixes the casing 6 in the wellbore.

A radially expandable production liner 14 extends from within the lower end part 16 of the casing 6 to near the wellbore bottom 8. The liner 14 includes an upper part in the form of liner tube 20, and a lower part in the form of a tubular sandscreen 22 which is adapted to

substantially prevent inflow of sand into the liner 14 during production of hydrocarbon oil from the formation zone 4. The liner tube 20 and the sandscreen 22 are interconnected by a pin-box type connector 24. An upper  
5 portion 18 of the liner tube 20 which extends into the casing 6 has been radially expanded against the inner surface of the casing 6 so as to form a tight interference fit with the casing 6.

The sandscreen 22 includes a fluid conduit in the  
10 form of base pipe 26 provided with through-holes 28, a filter layer 30 around the base pipe 26, and a swelleable sleeve 32 around the filter layer 30. In Figure 1 the right-half portion of the sandscreen 22 is shown in longitudinal section and the left-hand  
15 portion is shown in side view, whereby parts of the filter layer 30 and sleeve 32 of the left-hand portion are removed for the sake of clarity.

The sleeve 32 is made of a swelleable polymer in elastomeric configuration, which polymer swells when it  
20 comes into contact with water. A suitable water swelleable polymer is starch -polyacrylate acid graft copolymer. The material of the sleeve 32 does not significantly swell when it comes into contact with hydrocarbon oil. Furthermore, the sleeve is provided with  
25 a plurality of fluid passages in the form of through-openings 34. The size of the through-openings is such that these become closed when the polymer material of the sleeve 32 swells upon contact with water.

During normal operation the casing 6 is lowered and  
30 cemented in the wellbore 1, whereafter the liner the liner 14 is lowered through the casing 6. Subsequently the liner 14 is radially expanded by pumping, pushing or pulling an expander through the liner 14 whereby both the

liner tube 20 and the sandscreen 22 are expanded. The upper portion 18 of the liner tube 20 becomes firmly fixed to the casing 6 as a result of the expansion process.

5 Oil is then produced from formation zone 4, via the sandscreen 22 to the interior of liner 14, and from there to surface via one or more production tubings (not shown). During the lifetime of the well the level of the oil/water contact at the interface of zones 4 and 10 5 may rise due to depletion of the oil reservoir. As the oil/water contact reaches the lower end of the sandscreen 22, the polymer material of a lower end part of the sleeve 32 which has come into contact with formation water, swells as a result of the contact with 15 the water. The through-openings 34 in the lower end part of the sleeve 32 are thereby effectively closed. In this manner it is achieved that formation water is prevented from flowing into the lower end part of the sandscreen 22, while oil can still flow into the 20 remaining upper part of the sandscreen 22. The amount of through-openings 34 which become closed will gradually increase as the water level rises, until all through-openings 34 are closed when the water level has reached the upper end of the sandscreen 22.

25 The swelleable sleeve 32 therefore effectively prevents production of significant amounts of formation water during the lifetime of the well.

It will be understood that the scope of the present invention is not limited to application of the sleeve of 30 swelleable material described above, and that variations whereby a swelleable material induces increased inflow resistance of an undesired fluid when the material swells

upon contact with the undesired fluid are included in the scope of the invention.

5        Instead of applying the swelleable sleeve around the filter layer, the sleeve can be applied between the filter layer and the base pipe. Furthermore, the sleeve can be provided with an outer protective shroud.

      Instead of expanding the upper portion of the liner against the casing to create an interference fit, a conventional liner hanger can be used.

10       Instead of applying the sleeve directly to the filter layer, the sleeve can be applied on a carrier weave of an inert material, such as steel, glass-or carbon-fibre or a non-swelling polymer.

C L A I M S

1. A wellbore device comprising a fluid passage for transferring fluid between an earth formation and a surface facility, and a body transferable from a first mode to a second mode upon contact of the body with a selected fluid, said body being arranged so as to substantially close the fluid passage upon transfer of the body from the first mode to the second mode due to contact of the body with the selected fluid.

2. The wellbore device of claim 1, wherein the wellbore device is adapted to be arranged in a wellbore formed in the earth formation.

3. The wellbore device of claim 1 or 2, wherein said body has a larger volume in the second mode than in the first mode.

4. The wellbore device of any one of claims 1-3, wherein said body comprises a body of swelleable material which swells upon contact of the body with the selected fluid, said body of swelleable material being arranged so as to substantially close the fluid passage upon swelling of said body due to contact of the body with the selected fluid.

5. The wellbore device of claim 4, wherein the fluid passage is formed in the body of swelleable material.

6. The wellbore device of claim 5, comprising a first said fluid passage formed in a first part of said body and a second said fluid passage formed in a second part of said body, wherein the first fluid passage is closed due to contact of the first body part with the selected fluid, and wherein the second fluid passage is open.

7. The wellbore device of claim 6, wherein the first body part comprises a plurality of said first fluid passages, and the second body part comprises a plurality of said second fluid passages.

5 8. The wellbore device of any one of claims 4-7, wherein said body of swelleable material is formed as a tube, and wherein the, or each, fluid passage passes through the wall of the tube.

10 9. The wellbore device of claim 8, further including a perforated tubular conduit, and wherein the body of swelleable material is formed as a sleeve extending around the perforated tubular conduit.

15 10. The wellbore device of claim 9, wherein the perforated tubular conduit is provided with a filter layer for preventing flow of solid particles from the earth formation to the surface facility so as to form a sandscreen.

20 11. The wellbore device of claim 10, wherein the filter layer is arranged between the perforated tubular conduit and the sleeve of swelleable material.

12. The wellbore device of any one of claims 9-11, wherein the sleeve is one of the group of a permeable sleeve, a perforated sleeve, and a sleeve having an open weave structure.

25 13. The wellbore device of any one of claims 9-12, wherein the perforated tubular conduit is radially expandable.


30 14. The wellbore device of claim 13, wherein the wellbore device is arranged in the wellbore and wherein the sandscreen has been radially expanded so that the sleeve is substantially in contact with the wellbore wall.

15. The wellbore device of any one of claims 1-14, wherein the selected fluid is earth formation water.

16. The wellbore device of any one of claims 1-15,  
wherein said body comprises a water swelleable material  
selected from the group of starch -polyacrylate acid  
graft copolymer, polyvinyl alcohol cyclic acid anhydride  
5 graft copolymer, isobutylene maleic anhydride, acrylic  
acid type polymers, vinylacetate-acrylate copolymer,  
polyethylene oxide polymers, carboxymethyl cellulose type  
polymers, starch-polyacrylonitrile graft copolymers and  
the like, highly swelling clay minerals, Sodium  
10 Bentonite, and Sodium Bentonite having as main ingredient  
montmorillonite.

17. The wellbore device substantially as described  
hereinbefore with reference to the drawings.

Fig.1.

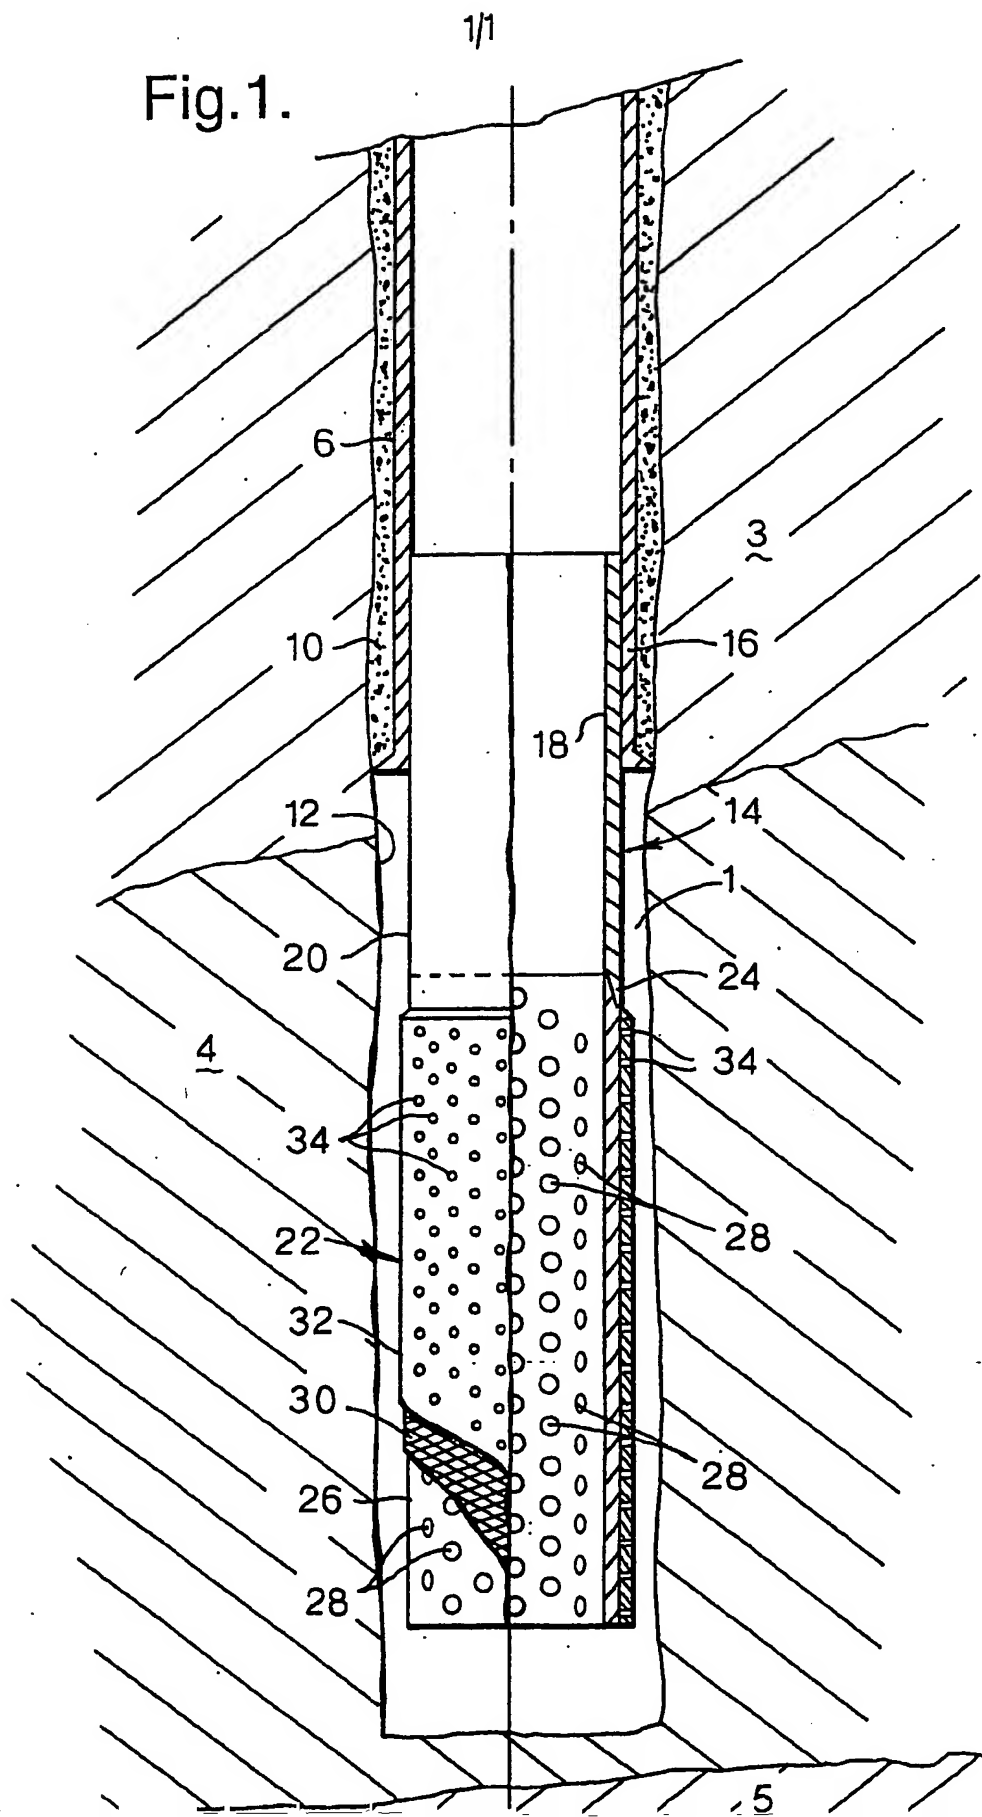

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number  
**WO 2004/022911 A3**

(51) International Patent Classification<sup>7</sup>: **E21B 43/08,**  
43/10

(21) International Application Number:  
PCT/EP2003/010004

(22) International Filing Date:  
5 September 2003 (05.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02078685.1 6 September 2002 (06.09.2002) EP

(71) Applicant (for all designated States except US): **SHELL  
INTERNATIONALE RESEARCH MAATSCHAPPIJ  
B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR  
The Hague (NL).

Gerard, Rene [NL/NL]; Volmerlaan 6, NL-2288 GD  
Rijswijk (NL). CORNELISSEN, Erik, Kerst [NL/NL];  
Volmerlaan 6, NL-2288 GD Rijswijk (NL). DEWAR,  
John, Alexander, Gordon [US/NL]; Volmerlaan 8,  
NL-2288 GD Rojswojk (NL). MASON, David, Leslie  
[US/US]; 1723 Beacon Cove Court, Katy, TX 77450 (US).  
VOLLEBREGT, Jean, Erik [NL/NL]; Volmerlaan 8,  
NL-2288 GD Rijswijk (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOSMA, Martin,**

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: WELLBORE DEVICE FOR SELECTIVE TRANSFER OF FLUID

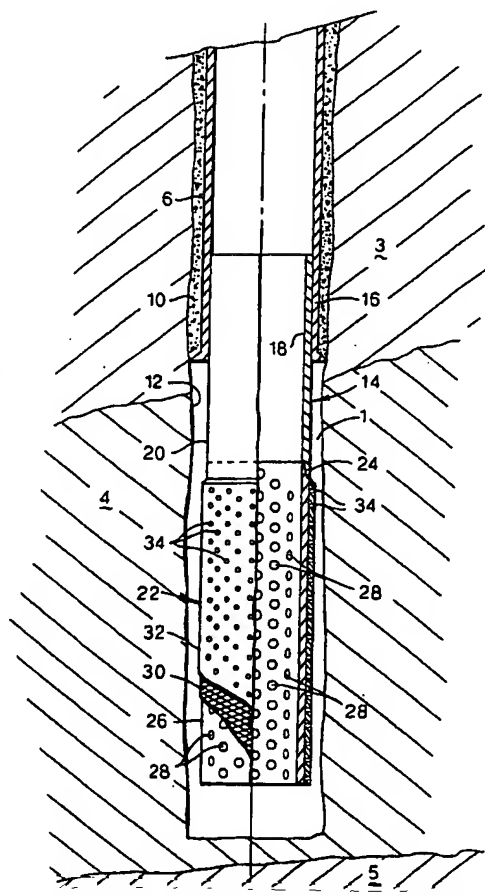

(57) Abstract: A wellbore device is provided which comprises a fluid pas-  
sage (34) for transferring fluid between an earth formation (4) and a surface  
facility, and a body (42) transferable from a first mode to a second mode  
upon contact of the body with a selected fluid. Said body is arranged so as  
to substantially close the fluid passage upon transfer of the body from the  
first mode to the second mode due to contact of the body with the selected  
fluid.

WO 2004/022911 A3



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:

22 April 2004

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No

PC/EP 03/10004

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 E21B43/08 E21B43/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 45031 A (SCHLUMBERGER TECHNOLOGY CORP) 3 August 2000 (2000-08-03) page 7, line 21 - line 30; figure 14 ---	1-10, 12, 15, 16
X	US 2002/020527 A1 (KVERNHEIM ARNE LUND ET AL) 21 February 2002 (2002-02-21) column 6, line 5 - line 16; figure 8 ---	1-10, 12, 14, 16
X	US 4 936 386 A (COLANGELO ROBERT V) 26 June 1990 (1990-06-26) column 11, line 11 - line 25; figure 10 -----	1-4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

25 February 2004

Date of mailing of the international search report

02/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.

Authorized officer

033 S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/EP 03/10004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0045031	A	03-08-2000	AU 3219000 A	18-08-2000
			WO 0045031 A1	03-08-2000
			US 2002066561 A1	06-06-2002
<hr/>				
US 2002020527	A1	21-02-2002	NO 20011569 A	22-01-2002
			AU 9441201 A	05-02-2002
			BR 0112621 A	10-06-2003
			CA 2416645 A1	31-01-2002
			EP 1301686 A2	16-04-2003
			WO 0208562 A2	31-01-2002
<hr/>				
US 4936386	A	26-06-1990	US 4919989 A	24-04-1990
<hr/>				